


F38-4500WHA-1 LED SPREADER LIGHT



FEATURES

- Six (6) high-powered 1-Watt LEDs
- Efficient LEDs provide 100,000 hour operation
- High (675 Peak Lumens) light output equivalent to a 50W halogen
- Wide 150° light spread
- 12~28 Volt DC
- Low draw < 1 amp
- UV- & impact-resistant white housing & polycarbonate lens
- Water-proof (non-submersion) sealed housing
- Shock resistant LEDs
- Stainless mounting bracket with adjustable tilt
- Adjustable clamp for pipe (3/4" - 1" IPS)
- 1-year warranty

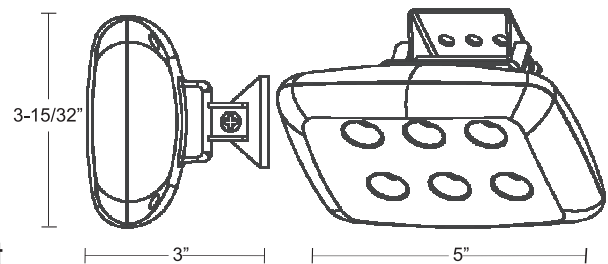

BENEFITS

- High output & wide light spread for maximum visibility in cockpit
- Low draw won't drain battery
- Impervious to water spray, wash-downs & pounding wake, ideal for marine use
- Direct light as needed with stainless steel adjustable tilt mounting bracket
- Versatile adjustable clamp installs on standard 3/4" & 1" pipe on T-top outer rings without drilling
- Quality backed by a 1-year warranty